


MOTOR SPECIFICATIONS:
24 V Motor and motor control circuit. Nominal speed 3100 RPM.
Current limiting device incorporated, motor limit switches not required.
Synchronized motor control circuitry, variable speed control not required.

MATERIAL & FINISH:
• HEADBOX: 18ga galvanized steel. Can be factory RAL dipped or painted in field by others.
• CURTAIN: Opaque glass and steel fiber fabric.
• AUX. RAILS: Galvanized structural steel.

APPROVED FOR FABRICATION BY:

SIGNATURE:

DATE:

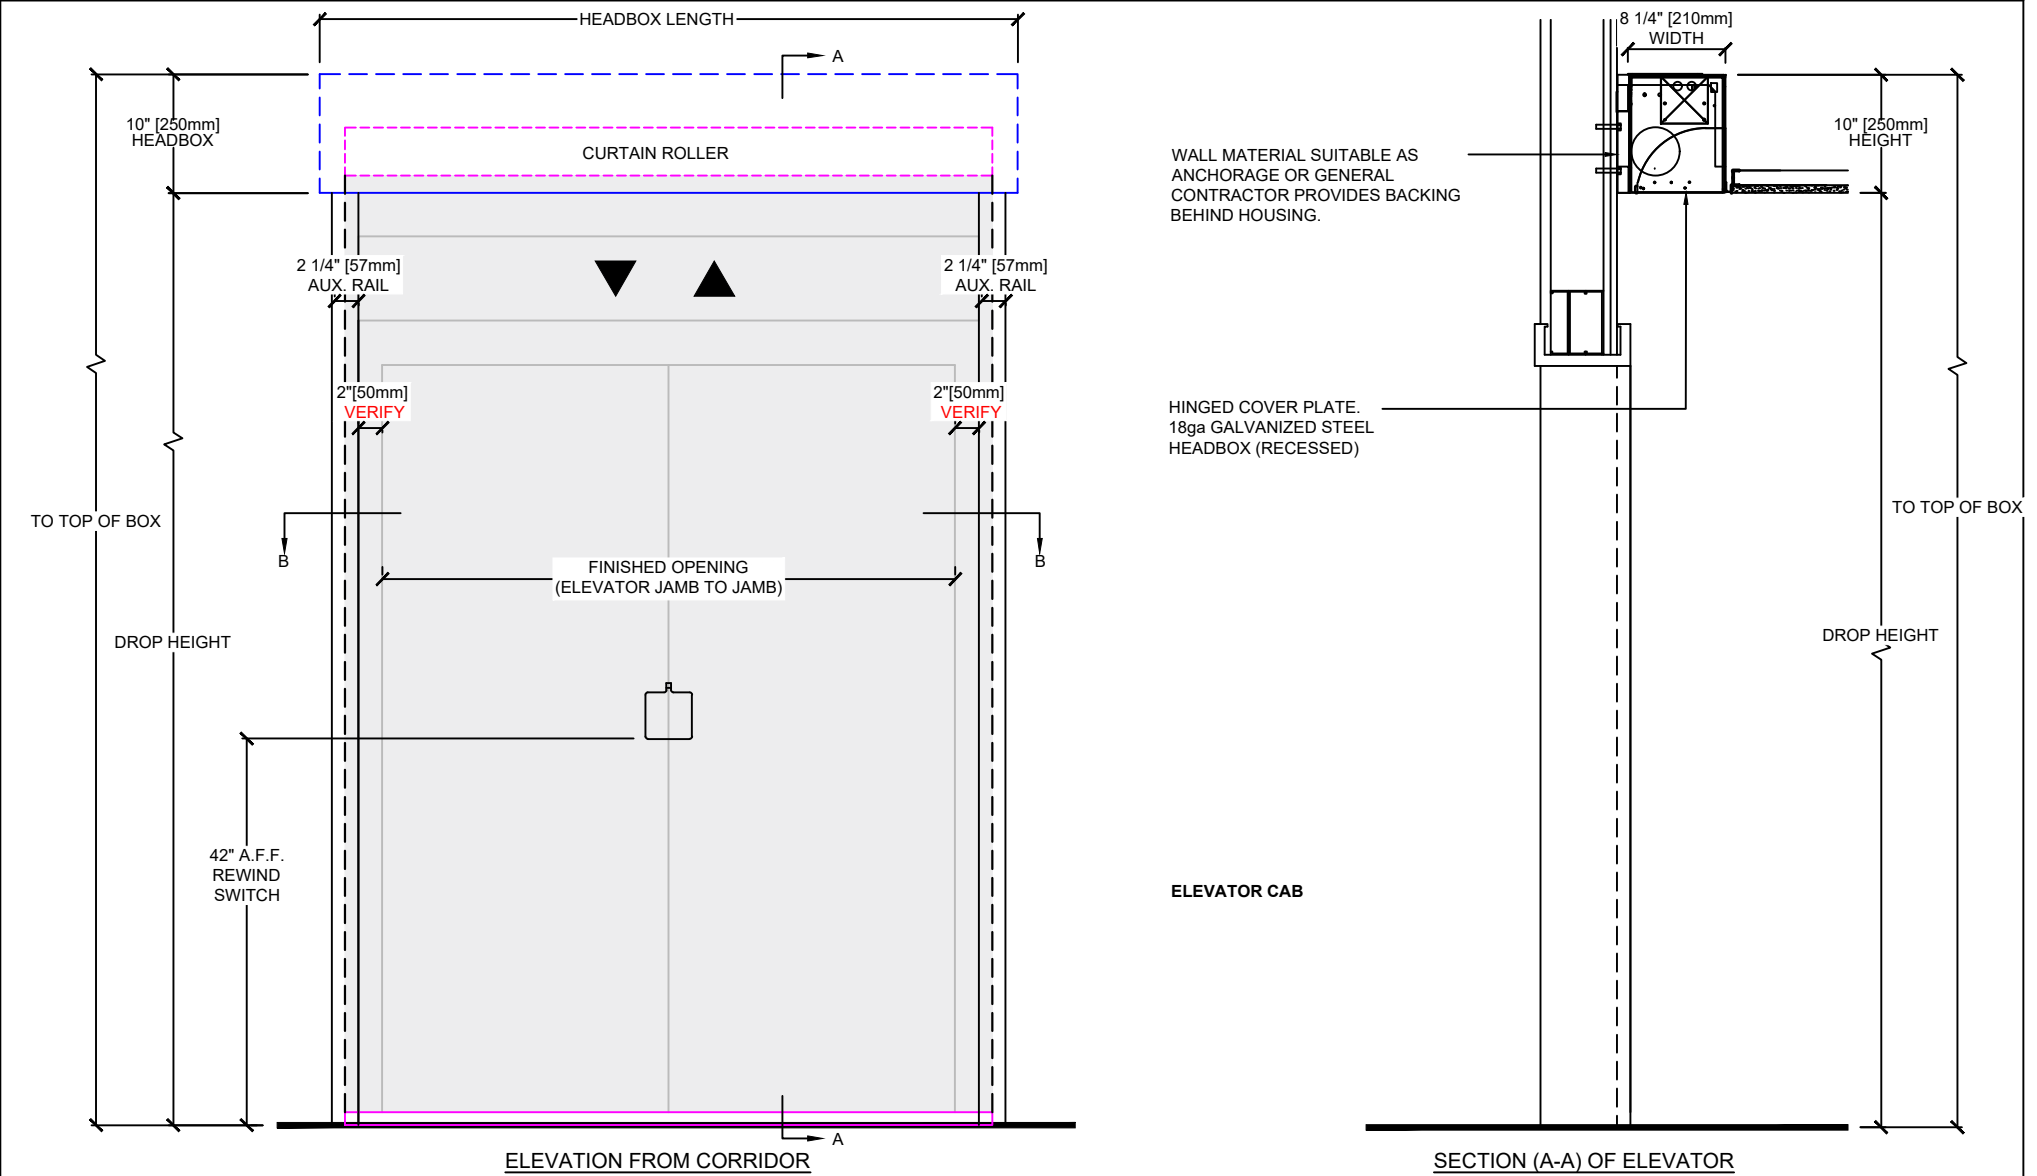

Project:
UNTITLED
Product Name:
ESC MAGNETIC SEAL CURTAIN
WITH AUXILIARY RAILS


#	REVISION	DATE	BY

Title: HEADBOX FLUSH WITH
FINISHED CEILING


Scale: NTS

Date: mmdd/yy

of

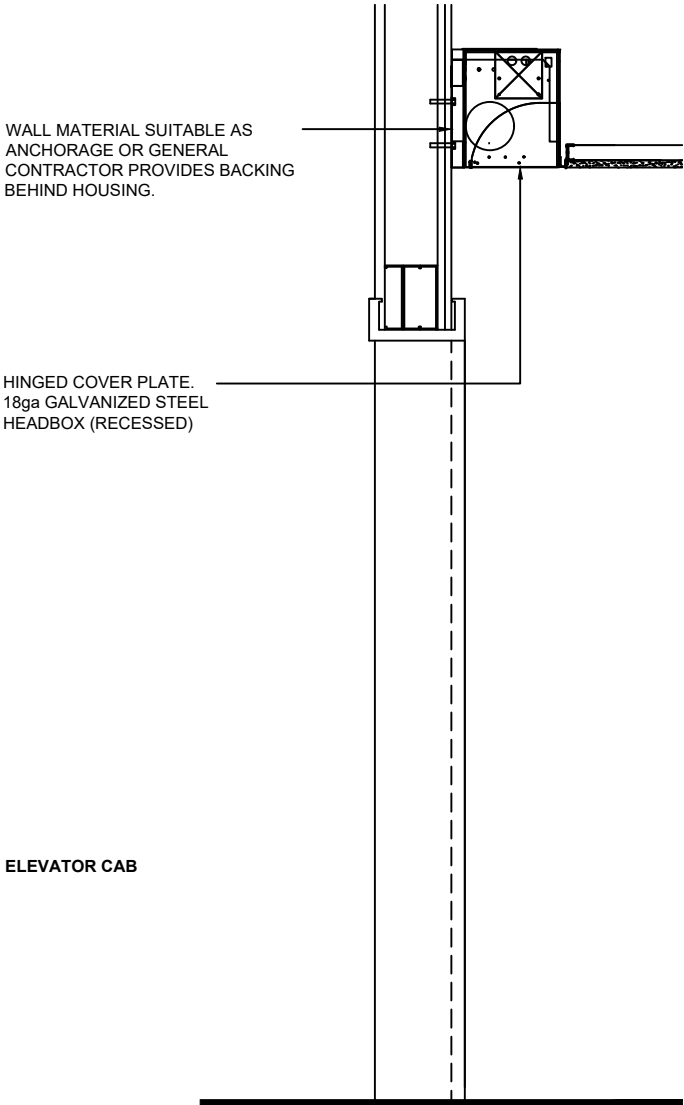

SECTION OF ELEVATOR - CURTAIN NOT DEPLOYED

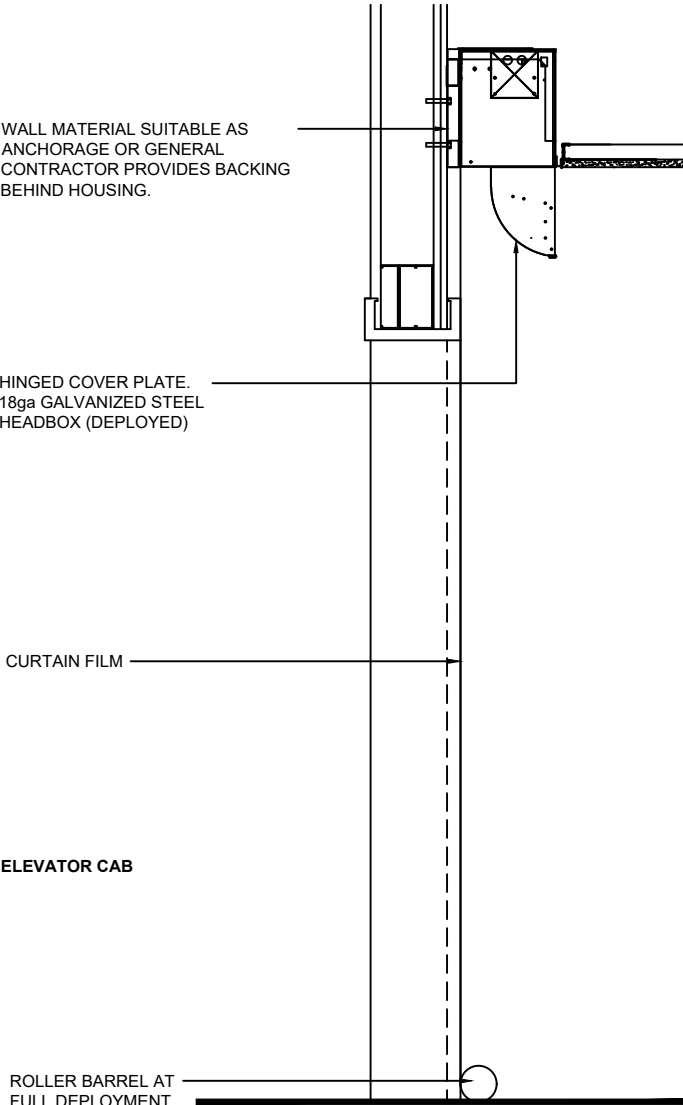

SECTION OF ELEVATOR - CURTAIN FULLY DEPLOYED TO FLOOR



U.S. SMOKE & FIRE®

Project:
UNTITLED
Product Name:
ESC MAGNETIC SEAL CURTAIN
WITH AUXILIARY RAILS

#	REVISION	DATE	BY

Title: HEADBOX FLUSH WITH FINISHED CEILING

Scale: NTS

Date: mmdd/yy

of