

MOTOR SPECIFICATIONS:
24 V Motor and motor controller (MC). Nominal speed 3100 RPM.
Current limiting device incorporated, motor limit switches not required.
Synchronized motor control circuitry, variable speed control not required. Up to 4 MC's per control panel.

CURRENT CHARACTERISTICS:
120 V AC (+/- 10%) 60 HZ
Electrical current **must** be verified in writing before job is released for manufacture; current verified and found correct.
The maximum allowable length of the 24v supply is 40 feet 14ga wiring.

ELECTRICAL EQUIPMENT LIST:
Motor (Motor location standard on left side of headbox face/front. If opposite location is required, it must be identified)
Motor Controller (MC)
Control Panel (CP)



MATERIAL & FINISH:
• BOX: 18ga galvanized steel. Factory primed. Optional powder coating black, white and gray for additional fee
• CURTAIN: Opaque glass and steel fiber fabric.
• BOTTOM BAR: Steel angle. Factory primed. Optional powder coating black, white and gray for additional fee
• SIDE GUIDES: 18ga galvanized steel. Factory primed. Optional powder coating black, white and gray for additional fee

APPROVED FOR FABRICATION BY:

SIGNATURE:

POSITION/COMPANY

DATE:

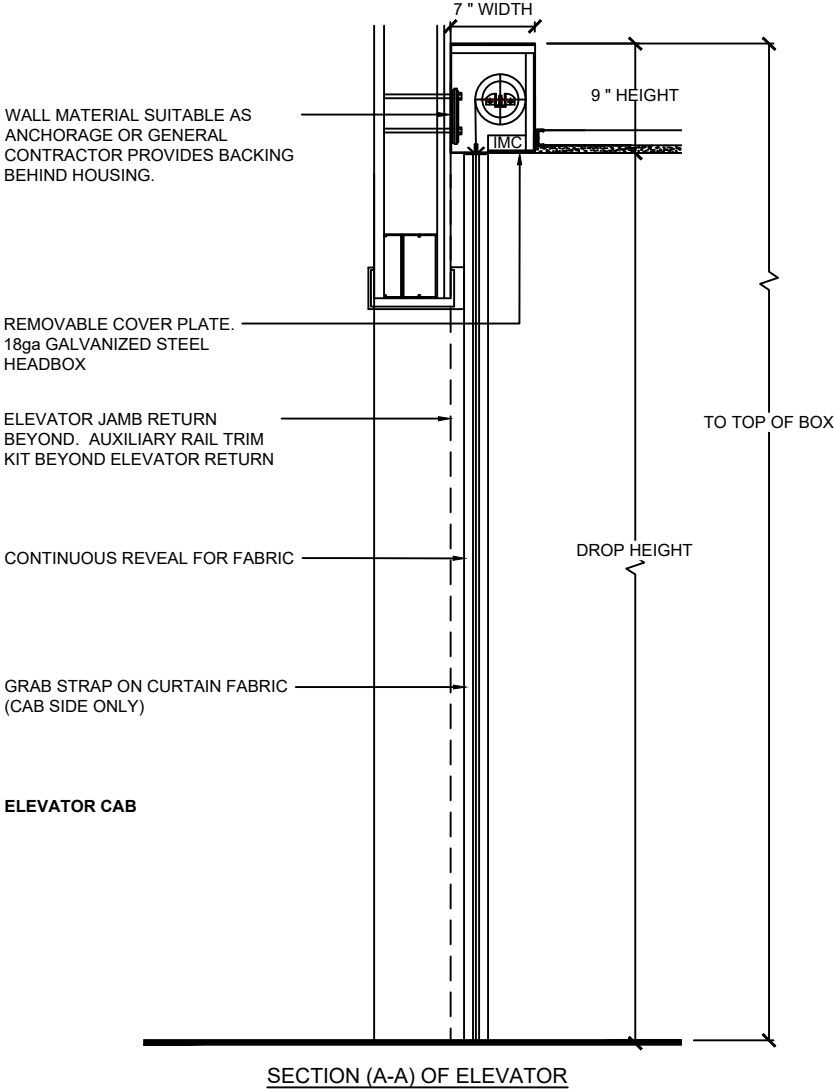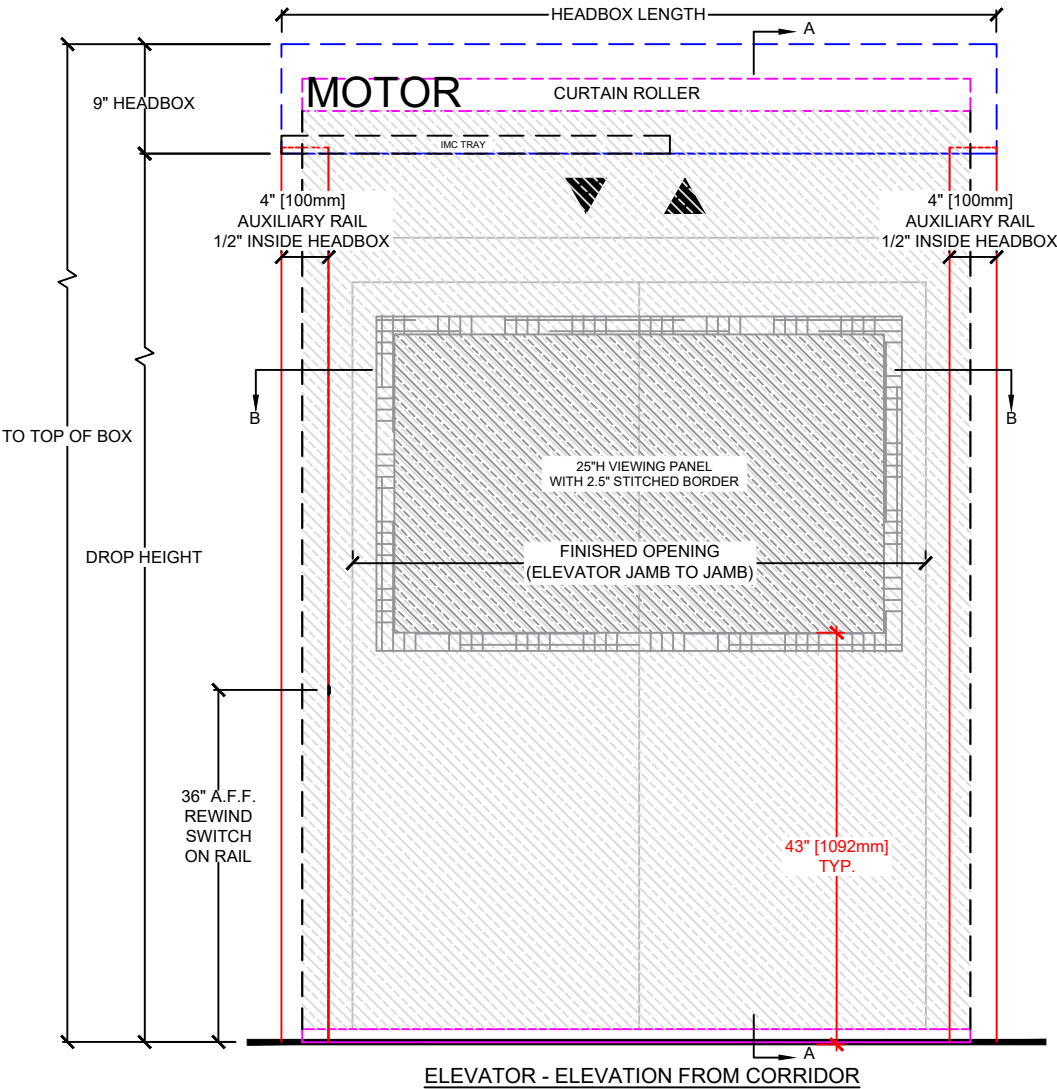

Project:
UNTITLED
Product Name:
SD60GS® WITH VP
FIRE PROTECTIVE SMOKE CURTAINS

#	REVISION	DATE	BY

Title: HEADBOX FLUSH WITH
FINISHED CEILING

Scale: NTS

of